


 **BOHNER®**

competence in kitchen technique





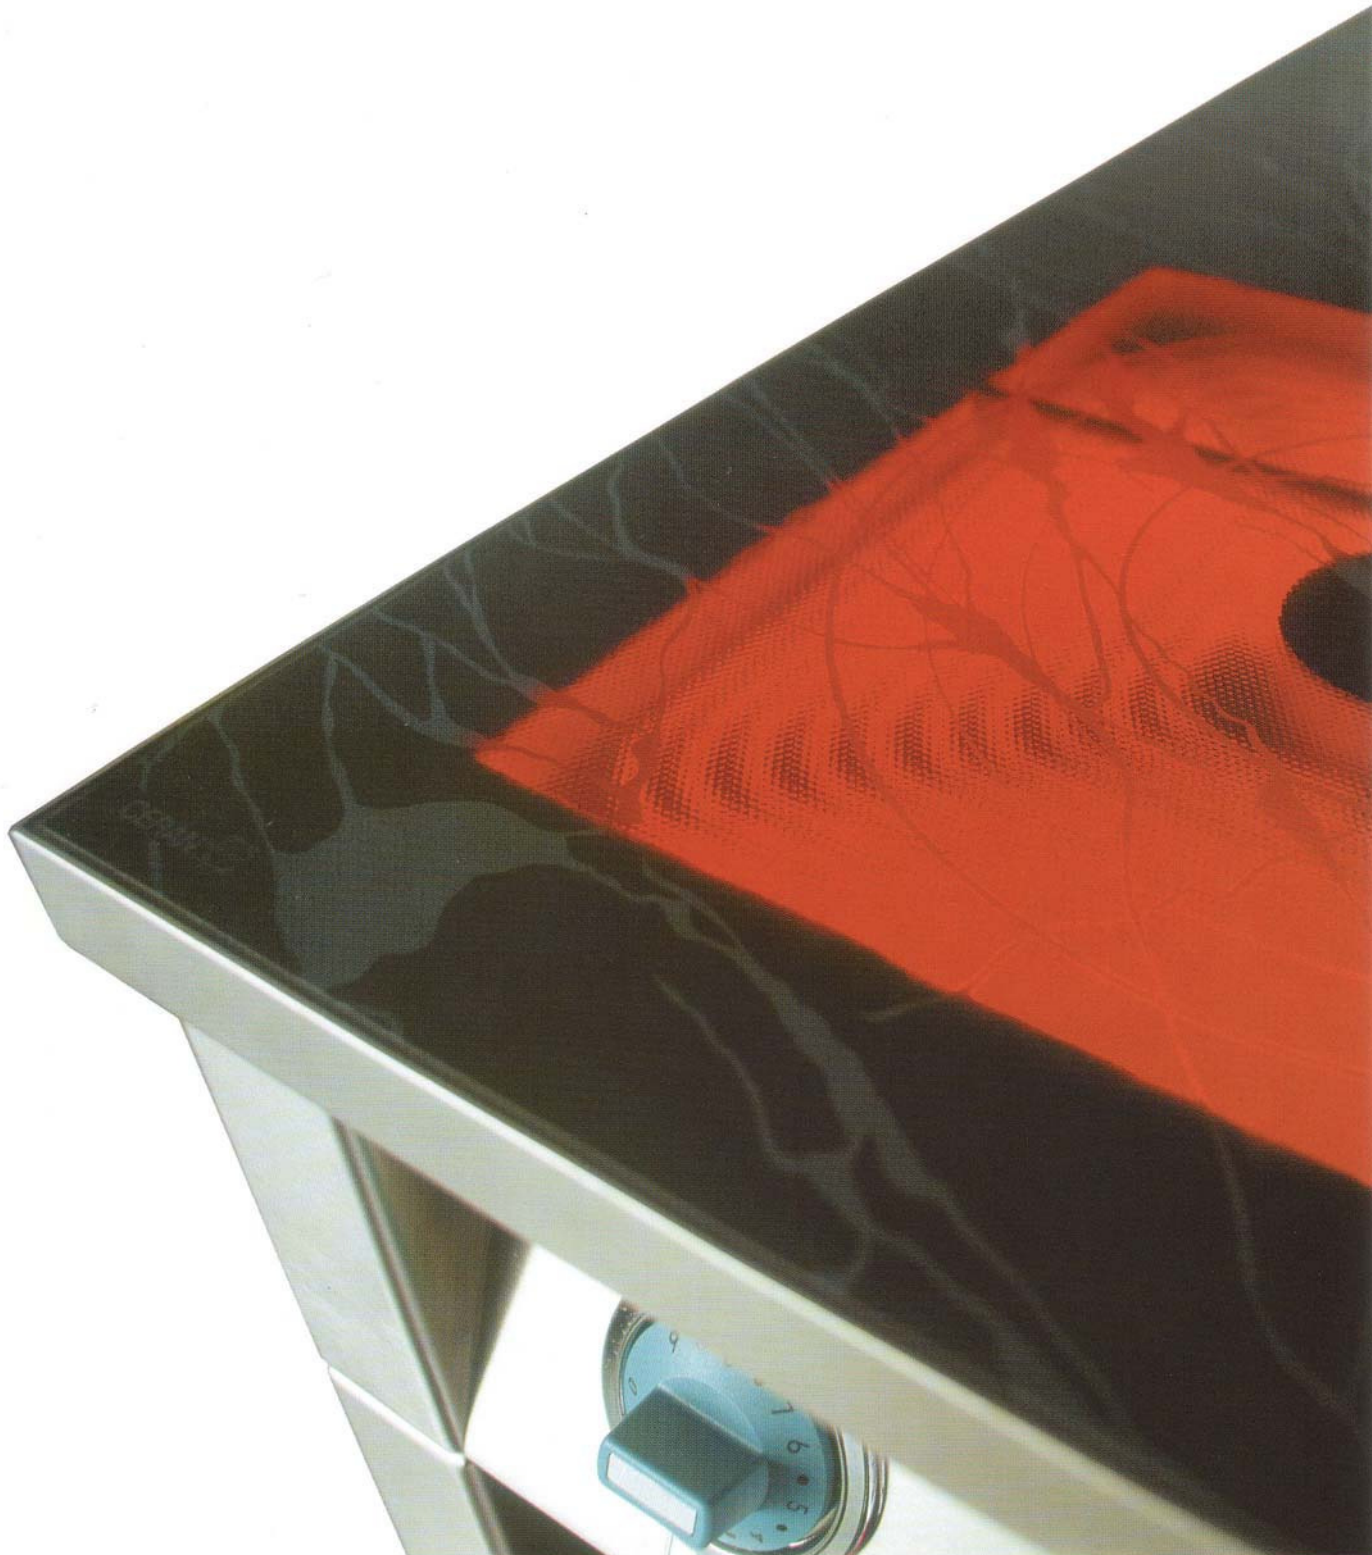



High-performance

Glass-Ceramik-stove "PROFI" & "SLK"

Available in 70 different
versions

Der Bohner Models

High-performance- Glass-Ceramik-stove-range

"PROFI"	Cooking-zones	Outer dimensions W x D	Glass-surface W x D	Heater cooking-zones	Version	Height
BC 10		400 x 400 mm	392 x 392 mm	● or ■	A = Table-top device	200 mm
BC 20		400 x 700 mm	392 x 692 mm	● or ■	S = Standing device	850 mm (900 mm)
BC 21		600 x 600 mm	592 x 592 mm	●		
BC 22		400 x 600 mm	392 x 592 mm	●		
BC 30		900 x 600 mm	892 x 592 mm	●		
BC 40		700 x 700 mm	692 x 692 mm	● or ■		



Standing devices also mobile

Standard-equipment with Hi-light-heaters ● round, 210 mm Ø, 2.3 kW incl. force control or radiation heaters squared ■ 300 x 300 mm = heating zone 270 x 270 mm, 4.0 kW incl. switch with thermostat

Each of our aforementioned table-top devices is designed to use it as **E = Drop-in device** for an easy flush-mounted or overlaying installation.



A further installation model offers the **K = Installation-KIT**. This loose installation set, consisting of heater/s in heating trough/s and operating controls permits a flexible flush-mounted or an almost flush-mounted (with installation frame) installation.

"SLK"	Cooking zone	Outer dimensions W x D	Glass-surface W x D	Heater cooking-zones	Power consumption	Version	Height
BC SLK 10		400 x 400 mm	392 x 392 mm	●	2,3 kW/230 V	A	100 mm
BC H 10 STOOL STOVE		600 x 600 mm	592 x 592 mm	■	4,0 kW/400 V	S	500 mm

The mentioned Glass-Ceramik-model **BC SLK 10** is also available as **E = Installation-trough with installation frame** for an almost flush-mounted installation in CNS-table plates or in other table-plates as marble, granite, timber.



BOHNER-Glass-Ceramik-stove – a proper thing Do you still troublesome clean a gas or an electric-iron-plate stove?

- Subsequently convertible to energy-saving induction.

Installation-Sample BC 40 K, flush-mounted, in range



BC SLK 10 A



BC 10 A



BC 20 A



Possible options with following extra equipment:

- ◆ Pan recognition fully automatic for radiation heaters ■
- ◆ Special-construction "MIX" with 2 heating zones: 1 x in front ● and 1 x behind ■:
Models: BC 20-M A/E/K/S + BC 22-M A/E/K/S

BOHNER
competence in kitchen technique

BC 20 S
fahrbar



Only available from good trade partners

Bohner Produktions GmbH
Industriestraße 13
D-88339 Bad Waldsee-Gaisbeuren



GERMANY

Fon: ++49(0)7524-9706-21
Fax: ++49(0)7524-9706-22

E-mail: info@bohnergmbh.de
Web: www.bohnergmbh.de